



DMA05, DMA05R, BA95S

Addressable manual call point, CE certified

- ***DMA05: addressable manual call point Resettable with integrated isolator.***
- ***DMA05R: addressable manual call point Resettable with integrated isolator and programmable relay.***
- ***CE certified according to CPD***

DMA05 manual call points are devices of transmission of an **alarm** status towards an **addressable indicating panel**. This action is carried out by the operator through mechanical pressure on the window located in the front.

Return to the normal status can be done only after **local resetting using a special key**.

Moreover the addressable version of manual call point integrates on every device a switch providing the function of **line isolator**. This function is assured only in association with the **HEPHAIS range** panels which are equipped with boards managing the loop/line. The function "**Isolator of line**" makes possible the isolation of **sections in short-circuit** (Short-circuit between 2 conductors of the connecting cable), located between 2 devices equipped with switch.

Usually, connection is carried out with **shielded cable from 0, 6mm² to 1,5mm²**. Shield must be **protected** by an insulator tape in order to avoid any short-circuit.

Call point also exists in **waterproof IP65** version **BA95S**



Main characteristics

- **CE certified according to CPD**
- Conform with the standards EN54-11, EN54-17, EN54-18
- Key for reset
- Separate key for test
- No break glass
- BA9S Waterproof IP65 version

Power supply specification

Main supply voltage	12V to 28Vdc
Nominal main supply voltage	24Vdc
Quiescent current	0.15 mA
Alarm current	5 mA @ 24Vdc

Mechanical characteristics

Unit weight	170g
Unit dimensions (in mm)	98 x 98 x 49
Unit row material	ABS
Unit colour	Red
Protection class	IP33

Climatic characteristics


Operating temperature	-10°C to +60°C
Storage temperature	+10°C to +50°C
Operating relative humidity	≤ 93%
Storage relative humidity	≤ 85%





DMA05, DMA05R, BA95S

Addressable manual call point, CE certified

Loop connection

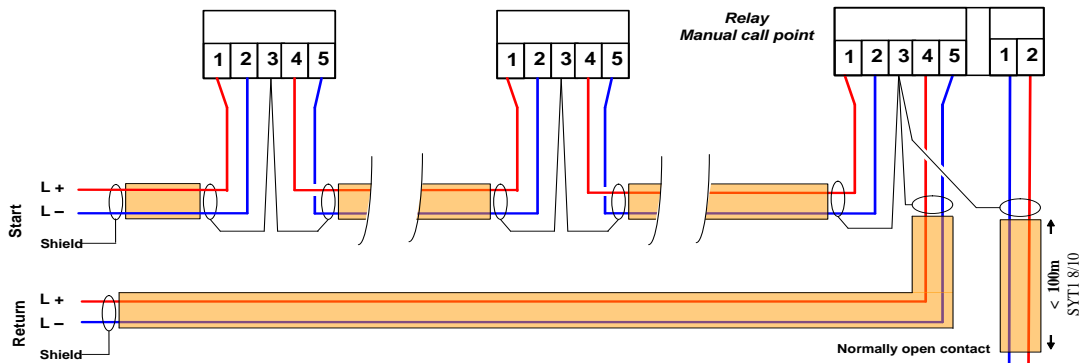

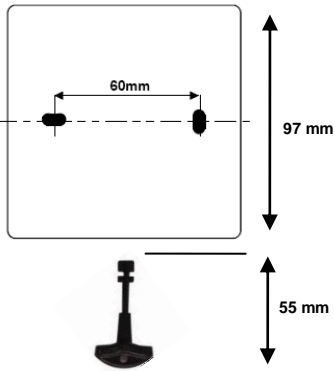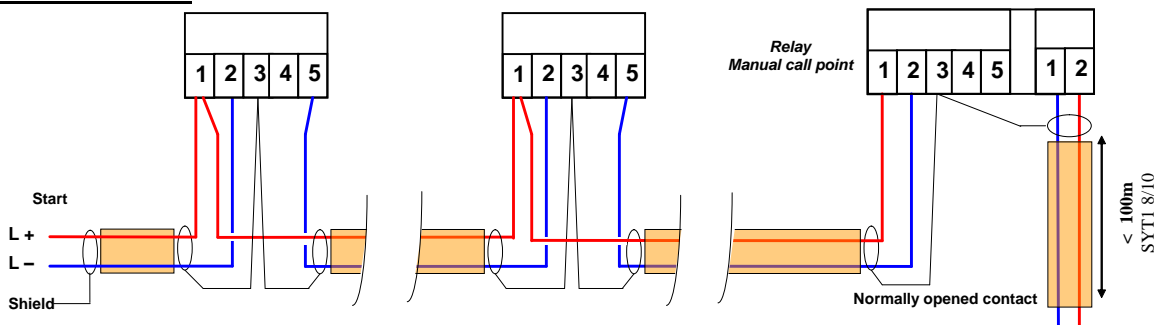


Line connection



Fixation holes and size.

Accessories.

-  Test key
-  Reset key
-  Plastic base for flush mounting



BA95S
Waterproof IP65 addressable manual call point

Main supply voltage	15 Vdc to 24 Vdc Nominal: 20 Vdc
Standby consumption	<math>< 110 \mu\text{A}</math> under 20Vdc
Alarm consumption	8 mA \pm 2mA under 20 V
Unit weight	400g
Unit dimensions (L x W xD)	110 x 127 x 72

REFERENCE

DMA05
DMA05R
BA95S

DESCRIPTION

Addressable manual call point- resettable with integrated isolator, CE certified according to CPD
Addressable manual call point- resettable with integrated isolator and programmable relay output. CE certified
Waterproof IP65 addressable manual call point

ACCESSORIES

PEDM Plastic base for flush mounting MCP, double action
VPDM Transparent lift-up protective cover for MCP, double action
KCTDM Kit of 10 reset keys for MCP

