

# E-B528 PRO 6

5 MP IR Fixed-focal Bullet Network Camera



## Accessories

PFA134




PFA130-E




PFA152-E



## Installation Method

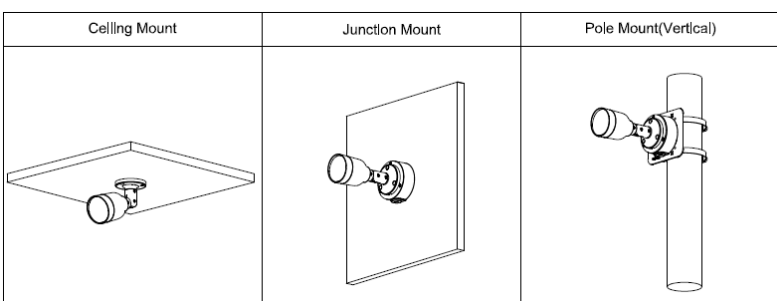

## Dimensions mm (inch)

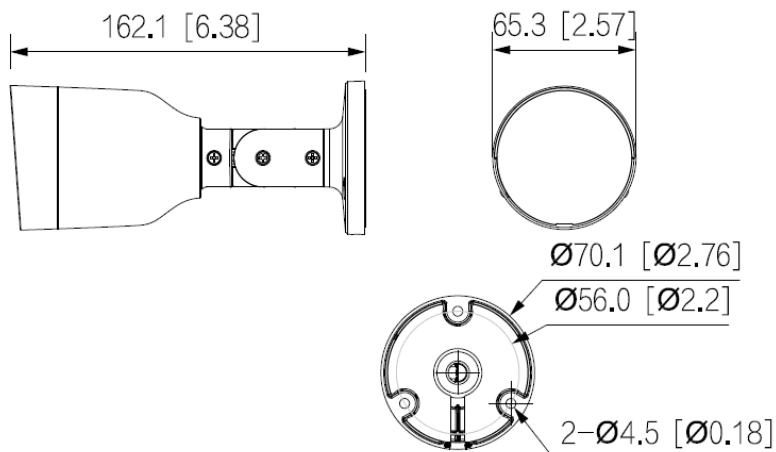

## Technical Specification

### Camera

Image Sensor	1/2.7" CMOS
Max. Resolution	2880 (H) × 1620 (V)
ROM	16 MB
RAM	128 MB
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100000 s
Min. Illumination	0.03 Lux@F2.0 (Color, 30 IRE) 0.003 Lux@F2.0 (B/W, 30 IRE) 0 Lux (Illuminator on)
S/N Ratio	>56 dB
Illumination Distance	30 m
Illuminator On/Off Control	Auto / Manual
Illuminator Number	1 (IR LED)
Pan/Tilt/Rotation Range	Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°

## Technical Specification

### Lens

Lens Type		Fixed-focal			
Lens Mount		M12			
Focal Length		2.8 mm			
Max. Aperture		F2.0			
Field of View		Horizontal: 106°; Vertical: 56°; Diagonal: 125°			
Iris Control		Fixed			
Close Focus Distance		0,8 m			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
		56,0 m	22,4 m	11,2 m	5,6 m

### Video

Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)			
Smart Codec	Smart H.265+; Smart H.264+			
Video Frame Rate	Main stream: 2880 × 1620 (1 fps–20 fps) 2688 × 1520 (1 fps–25/30 fps) Sub stream: 704 × 576 (1 fps–25 fps) 704 × 480 (1 fps–30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.			
Stream Capability	2 streams			
Resolution	2880 × 1620 (2880 × 1620); 2688 × 1520 (2688 × 1520); 2560 × 1440 (2560 × 1440); 3M (2048 × 1536); 2304 × 1296 (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)			
Bit Rate Control	CBR/VBR			
Video Bit Rate	H.264: 32 kbps–6144 kbps H.265: 12 kbps–6144 kbps			
Day/Night	Auto(ICR)/Color/B/W			
BLC	Yes			
HLC	Yes			
WDR	DWDR			
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom			
Gain Control	Auto / Manual			
Noise Reduction	3D NR			
Motion Detection	OFF/ON (4 areas, rectangular)			
Region of Interest (RoI)	Yes (4 areas)			
Smart Illumination	Yes			
Image Rotation	0°/90°/180°/270° (Support 90°/270° with 1080p resolution and lower)			
Mirror	Yes			
Privacy Masking	4 areas			

### Alarm

Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; safety exception
-------------	---

### Audio

Built-in MIC	Yes
Audio Compression	G.711a; G.711Mu; G.726; PCM

### Network

Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; SMTP; FTP; DHCP; DNS; NTP; Multicast
Interoperability	ONVIF (Profile S/Profile T); CGI; P2P; Genetec
User/Host	6 (Total bandwidth: 48 M)
Storage	FTP
Browser	IE: IE11; Chrome; Firefox
Management Software	Smart PSS; DSS; DMSS
Mobile Client	iOS; Android
Cyber Security	Video encryption; configuration encryption; Digest; WSSE; account lockout; security logs; generation and importing of X.509 certification; HTTPS; trusted boot; trusted execution; trusted upgrade

### Certification

Certifications	CE-LVD: EN62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B
----------------	---

### Power

Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.9W (12V DC); 2.3W (PoE) Max. (ICR + H.265 + max. resolution + main stream + DWDR + IR intensity): 3.9W (12V DC); 4.5W (PoE)

### Environment

Operating Temperature	-40°C to +60°C
Operating Humidity	≤95%
Storage Temperature	-40 °C to +60 °C
Protection	IP67

### Structure

Casing Material	Metal
Product Dimensions	162.1 mm × Φ70.1 mm
Net Weight	0,32 kg
Gross Weight	0,45 kg