


E-EFS-0902-90-G-120


11 Port Desktop Switch with 8 PoE Ports





Dimensions mm (inch)

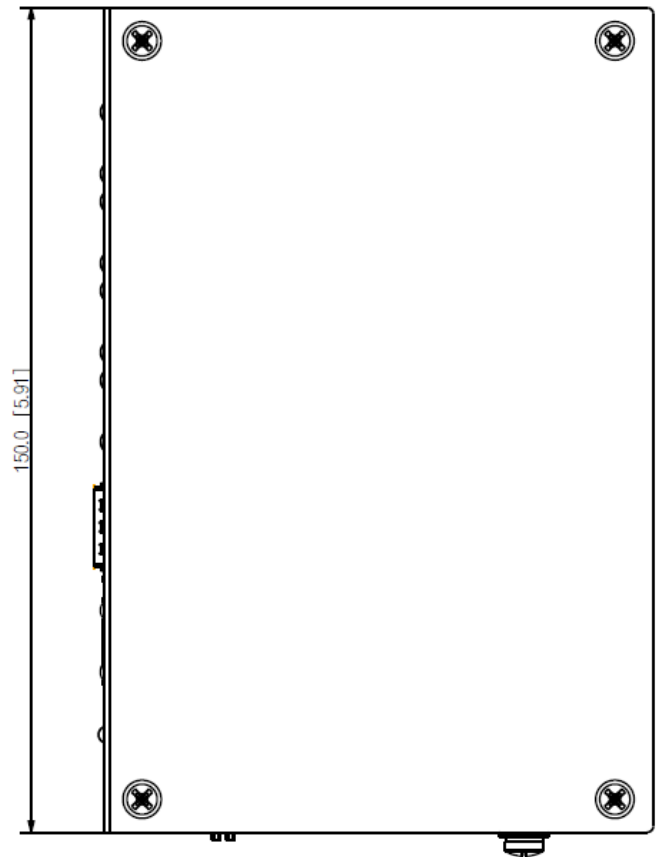

Panels

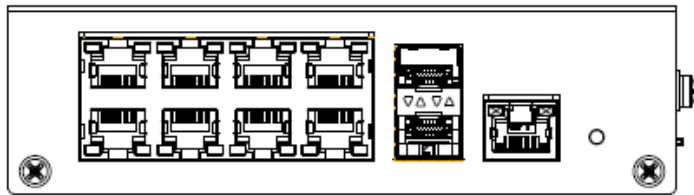

Installation

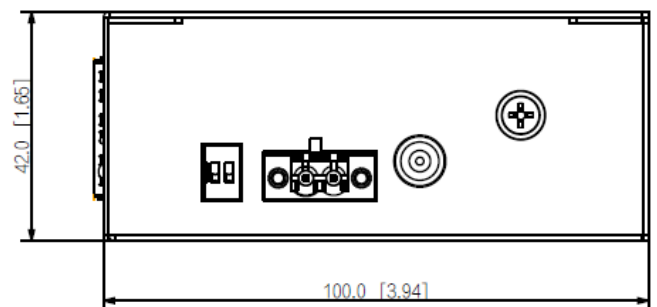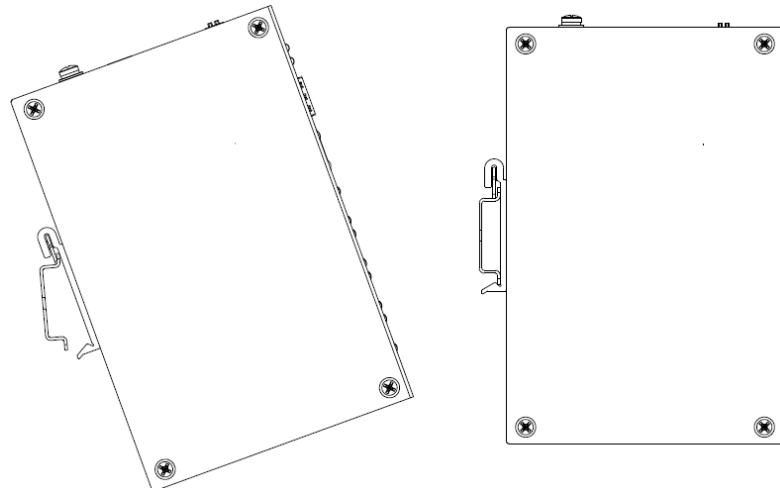

Technical Specification

Hardware Feature

Ethernet Port	Port 1-8: 8 × RJ-45 10/100/1000 Mbps (PoE) Port 9-10: 2 × SFP 1000 Mbps (uplink) Port 11: 1 × RJ-45 10/100/1000 Mbps (uplink)
PoE Power Consumption	Port 1-2 ≤ 90W, Port 3-8 ≤ 30W, Total ≤ 120W
Power Consumption	Idling: 5 W Full load: 120 W
Standard	IEEE802.3/IEEE802.3u/IEEE802.3X/IEEE 802.3az/IEEE 802.3ab

PoE

PoE Protocol	IEEE 802.3af/ IEEE 802.3at/ Hi-PoE/IEEE 802.3bt
Power Supply Pin	1,2,4,5 (V+),3,6,7,8 (V-)
Long Distance	250 m long distance PoE transmission
PoE Power Management	Yes
PoE Watchdog	Yes

Performance

Switching Capacity	33 Gbps
Packet Forwarding Rate	16.37 Mpps
Packet Buffer Memory	1.75 Mbit
Flow Control	Enable by default
VLAN Function	Port-based VLAN
Working Temperature	-30 °C to +65 °C
Application Humidity	5%~95% (RH)

General

Power Input	48 V - 57 V DC
Lighting Protection	Common mode 4 kV Differential mode 2 kV
ESD Protection	Air discharge 8 kV Contact discharge 6 kV
Wall-mount Installation	Yes
Anti-theft Lock Hole	Yes
Weight	0.67 kg
Dimension	150mm × 110mm × 42mm