


DESCRIPTION

The RM-200RJ is designed to convert the RJ45 connector into a screw terminal block. It is used to connect between a trunk cable (such as CPEV cable) and a feeder cable (such as LAN cable) in wiring a remote microphone. The built-in indicator shows the voltage status of DC power cable when the remote microphone cable for the SX-2000 series system is connected.

SPECIFICATIONS

Applied Voltage	40 V or less
Withstand Voltage	1 A
Voltage Indicator	Monitor terminals: Terminal No. 7 (+) and terminal No. 8 (-), extinguish voltage: 14 V or less, lighting voltage: 21 V or more, indicator ON/OFF switchable
Connector	RJ45 Connector: 1
Terminal	M3 screw terminal (10 pins), distance between barriers: 6.62 mm (0.26")
Operating Temperature	0°C to +40°C (32°F to 104°F)
Operating Humidity	35% to 80% RH (no condensation)
Finish	Surface-treated steel plate, black, paint
Dimensions	84 (W) X 116 (H) X 25.7 (D) mm (3.31" X 4.57" X 1.01")
Weight	250 g (0.55 lb)

APPEARANCE

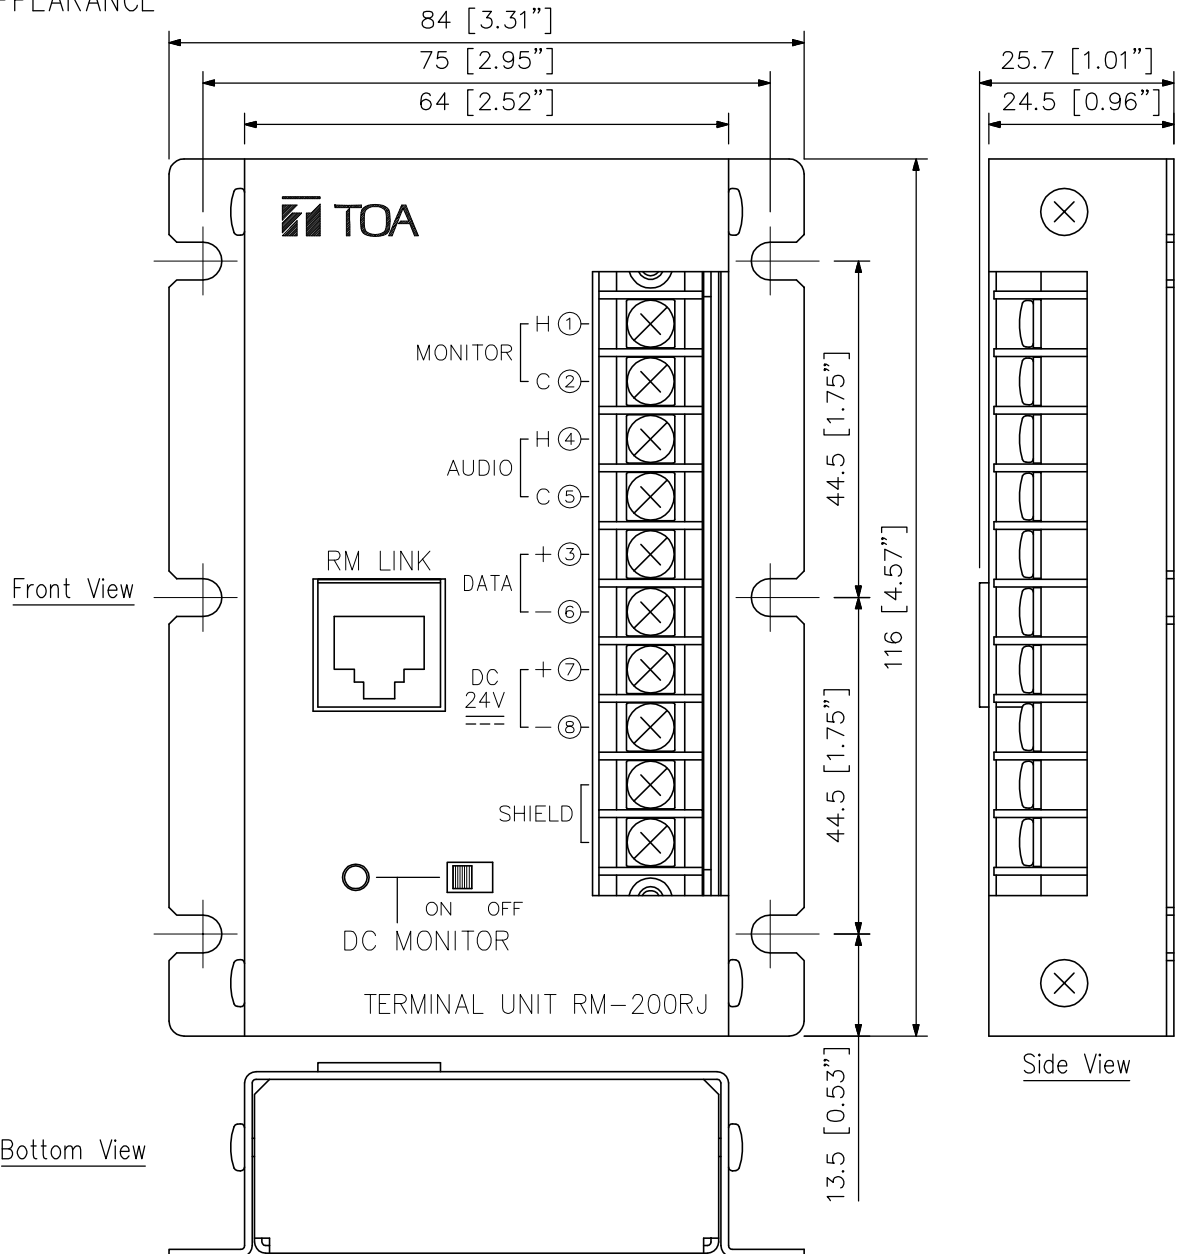

UNIT:mm SCALE:1/1